Zambelis LIGHTS

TÜV AUSTRIA EN ISO 9001:2015 No. : 20001250014453

TÜV AUSTRIA EN ISO 14001:2015 No. : 20051250014454


TÜV AUSTRIA ISO 45001:2018 No. : 20152260017859

5 YEARS WARRANTY

CE

RoHS Compliant

07052026

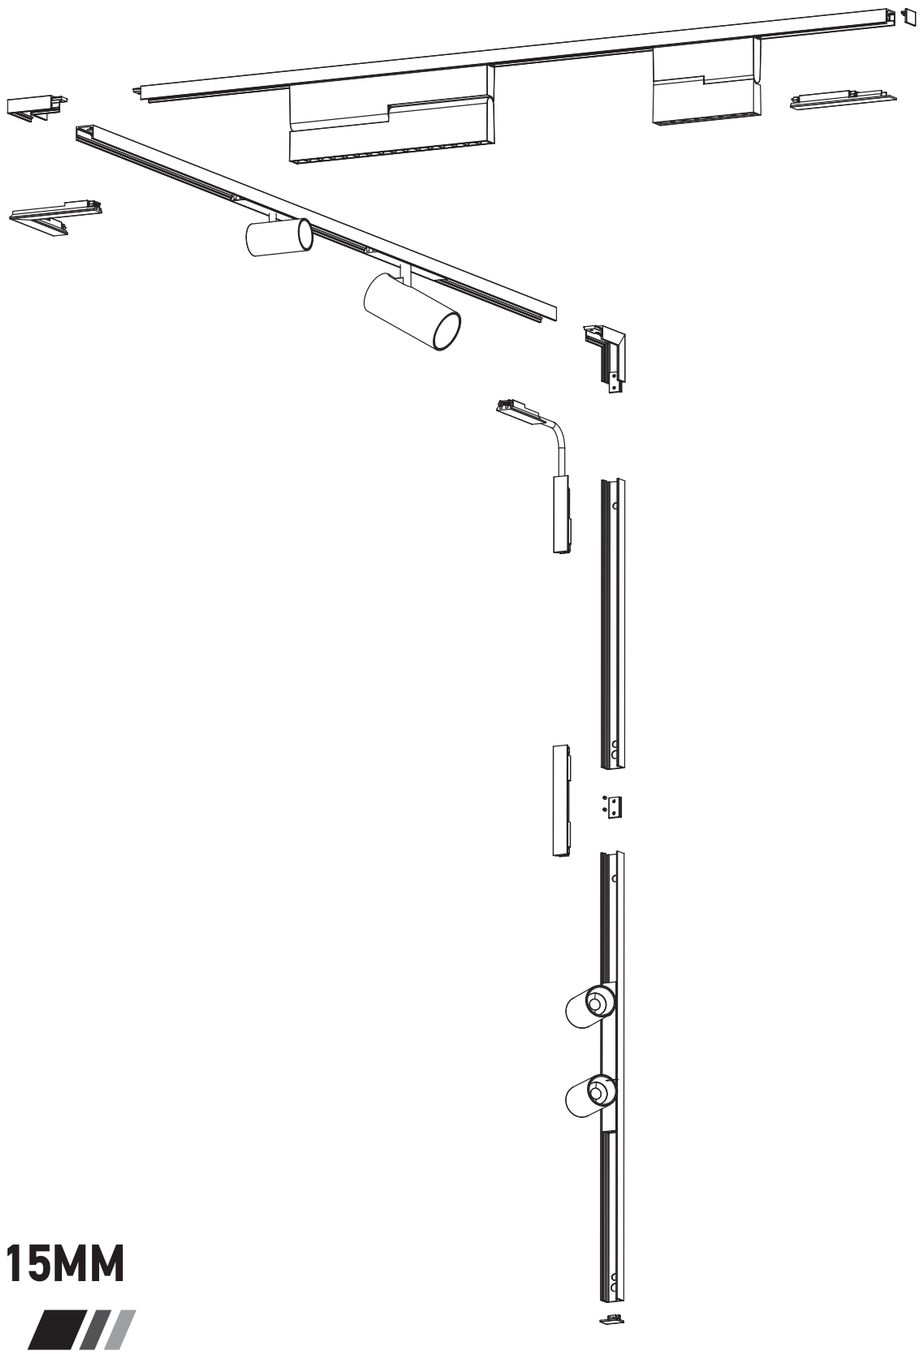

48V ULTRA SLIM MAGNETIC SYSTEM 15MM SURFACE INSTALLATION

Please read instructions before commencing installation and retain for future reference.

23118
23119
23120

Zambelis LIGHTS

SURFACE INSTALLATION
MAGNETIC TRACK RAILS

Feature:


This system includes tracks and accessories and is not interchangeable with similar products in the market . our tracks are only suitable for our accessories

Assembly and installation


	Turn off the power supply follow

Power supply voltage should be between 0-60V and the circuit current must not exceed 15A, there are 4 conductors in the track, including power line and signal line.
Switching power supplies,, control systems, and accessories that do not pass the SELV standard or have an output voltage exceeding 60V are prohibited.
Please note


Track Installation Diagram

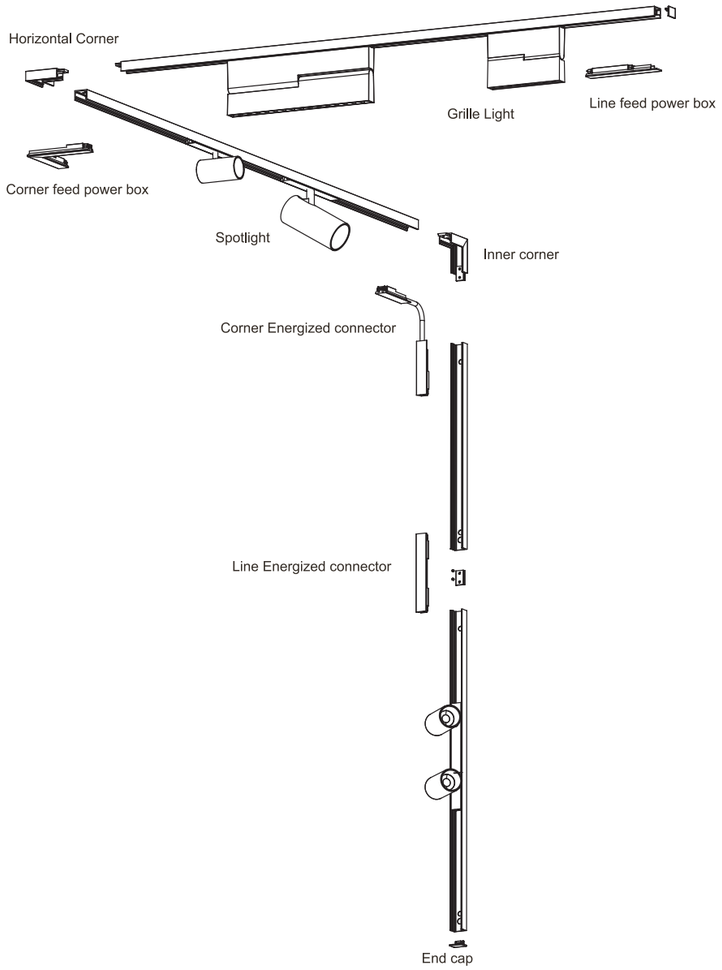


Assembly Description




Surface Mount Horizontal Corner
23131




Surface Mount Inner Corner
23132




Corner Energized Connector
23128



Line Energized Connector
23127




Feed power box
23126




Power
23159

★Horizontal corner and inner corner must be used with corner power connector
Track end cover, Installation accessories and dustproof PVC cover have been included in the track packaging, no additional order is required.


1. Ceiling Install — 23118 (100cm) I 23119 (200cm) I 23120 (300cm)

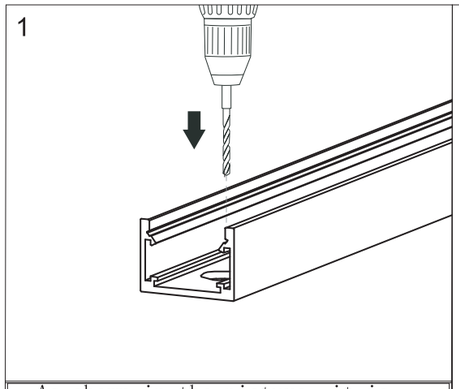


As shown in the picture, it is fixed by punching screws on the top

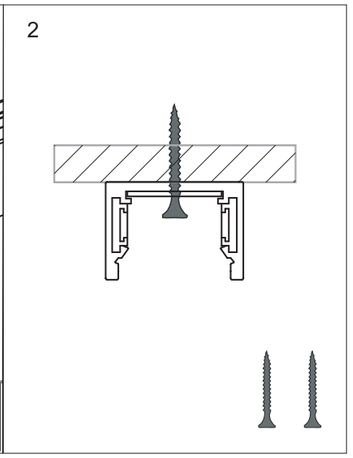


2.End Cap 23262

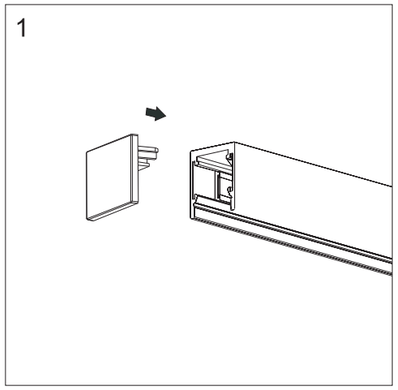


3.Straight Line Connection 23263

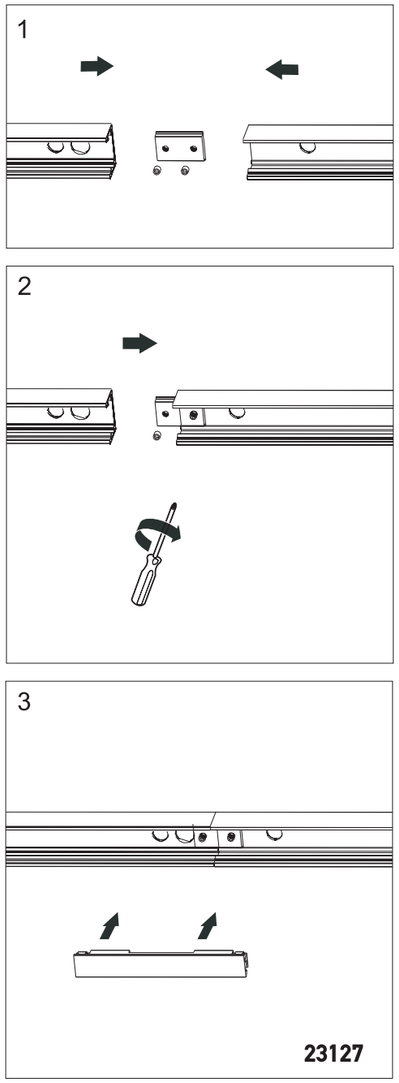


4.Corner Connection 23131 horizontal 90° 23132 vertical 90°

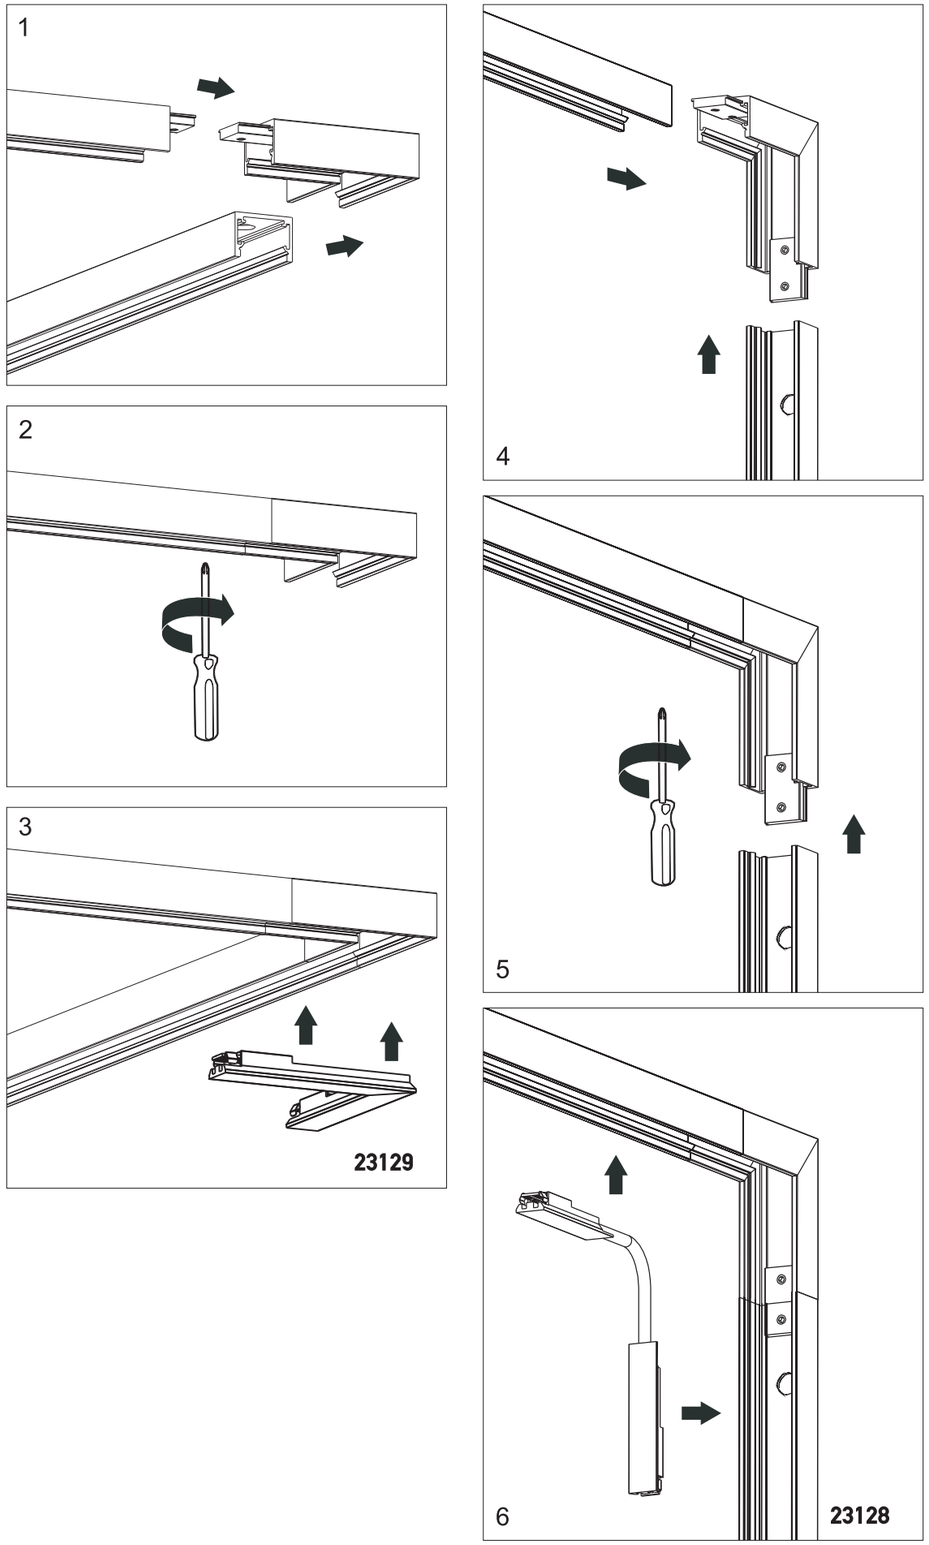


5.Wire Cinnection 23159

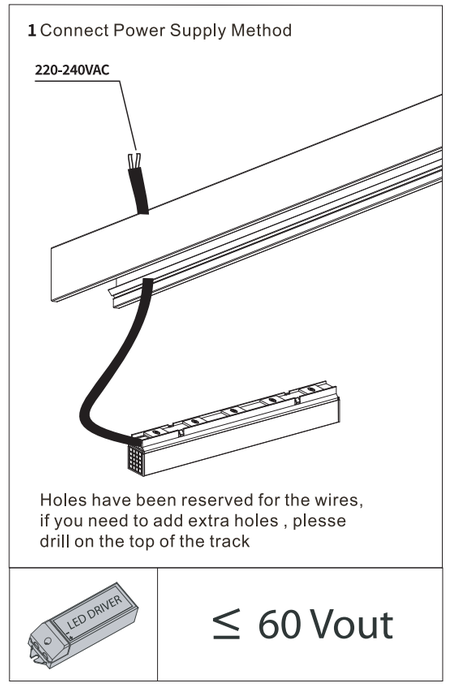

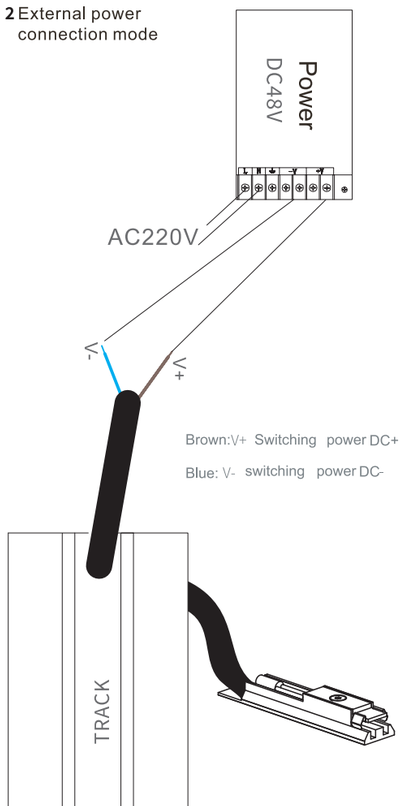

6. Cut Track And Drill Hole

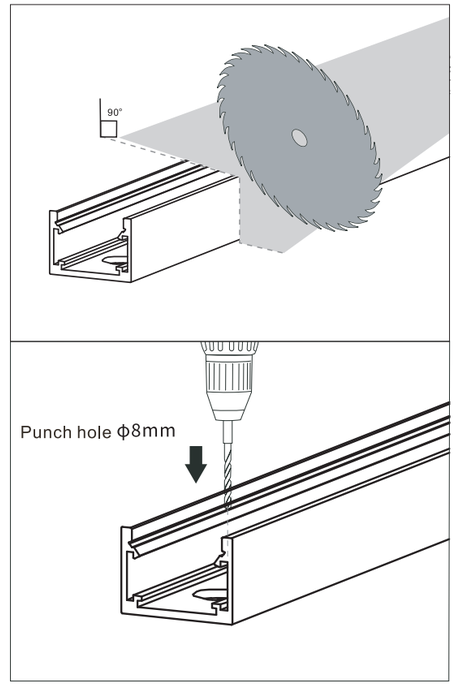

7. Feed To Track

